


HOW TO ORDER

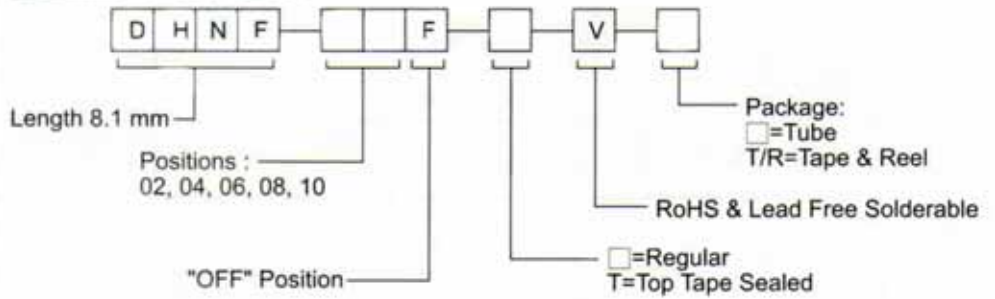

Precaution : For quality assurance, please operate actuators carefully to avoid any damage.

※D H N F Series will be available from Jul. 2008.

SPECIFICATION

MECHANICAL

Mechanical Life: 1000 operations.
Operation Force: 500gf
Stroke: 0.6mm

ENVIRONMENTAL

Operation Temperature Range: -40° C to +85° C.
Storage Temperature Range: -40° C to +85° C.




ELECTRICAL

Electrical Life: 1000 operation cycles
Non-Switching Rating: 100mA, 50VDC.
Switching Rating: 25mA, 24VDC.


PACKAGE

DHNF-02(-T): 125 pcs/tube
DHNF-04(-T): 75 pcs/tube
DHNF-06(-T): 54 pcs/tube
DHNF-08(-T): 40 pcs/tube
DHNF-10(-T): 33 pcs/tube
Tape and Reel: DHNF series: 2500 pcs/reel

DHNF

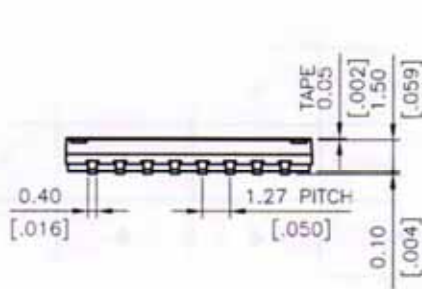

DHNF-10-V	10	13.93 [.548]
DHNF-08-V	8	11.39 [.448]
DHNF-06-V	6	8.85 [.348]
DHNF-04-V	4	6.31 [.248]
DHNF-02-V	2	3.77 [.148]
PROD. NO.	NO. OF POS.	DIM. A

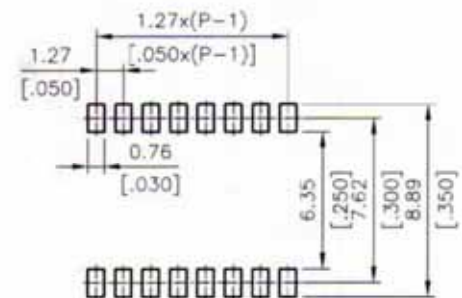

P.C.B. LAYOUT

General Tolerance: ±0.2mm(±0.008")