| Switch Type | MICRO Switch | Model | RL-020 |
|---|---|---|---|
| Rating | 3A 250VAC/6A 125VAC | Mechanical Life | 1,000,000 cycles |
| Withstand Voltage | AC1000V 1 minute | Electrical Life | 50,000 cycles |
| Insulation Resistance | ≥100MΩ DC500V | Operating temperature | -20° C - +80° C |
| Contact Resistance | ≤50mΩ | Ambient humidity | <85% RH |
| Solder ability | 245±5℃ 3 Sec. | Operating force | 200±60gf |

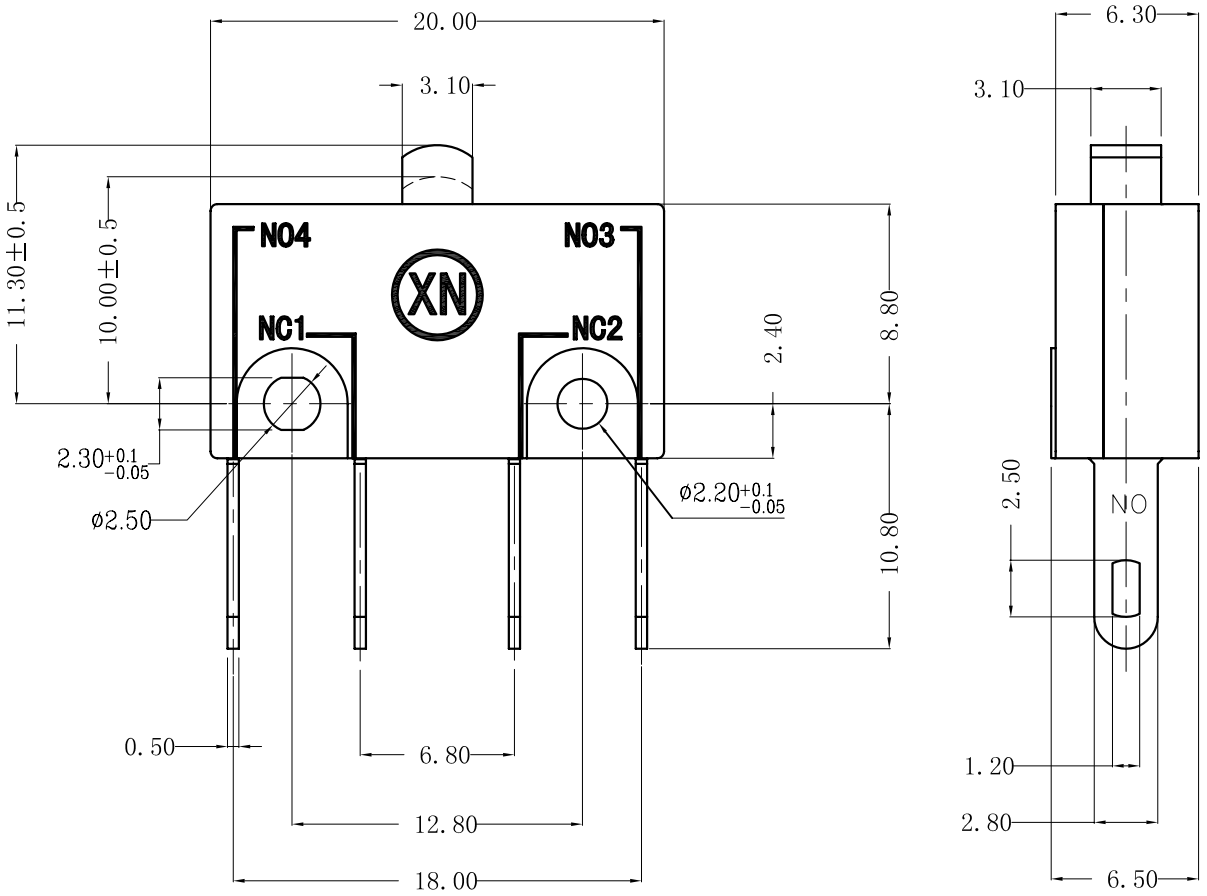


SCHEMATIC

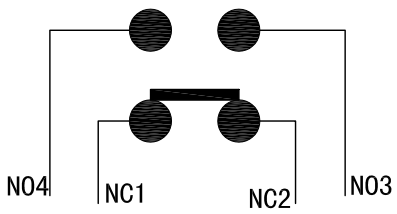


| | | | | | |
|---|---|---|---|---|---|
| | | | | | |
| | | | | | |
| Revision | Description | | | Date | Revisor |
| Drawing No. | | | C/0 | Tolerance | ±0.2 |
| Drawing Model. | SPECIFICATION OF STANDARD TYPE | | | Unit | mm |
| Prepared | | Reviewed | | Approved | | Effective date | |